

## Disconnecting Means

SolarAPP+ Fire Bulletin

### PV System

PV system disconnecting means shall be provided in accordance with the 2020 National Electrical Code® (NEC), NFPA 70.(R) [690.13]

A Rapid Shutdown switch shall be provided at a readily accessible location outside the building in accordance with the 2020 National Electrical Code® (NEC), NFPA 70.® [690.12(C)]

## Signs, Placards, Directories, and Markings Guidance

SolarAPP+ Fire Bulletin

### General

All labeling shall comply with Section 324 of the 2021 International Residential Code and Articles 690 and 705 of the 2020 National Electrical Code® (NEC), NFPA 70

All labeling shall comply with [NEC 110.21 (B)]

### Rapid Shutdown Label

Buildings with more than one rapid shutdown type:

A detailed plan view diagram showing each PV system and a dotted line around areas that remain energized after the rapid shutdown switch is operated. [NEC 690.56(C)]

Rapid Shutdown (PV Hazard Control) switch:

This switch shall have a label not greater than 3 feet from the switch that states the following:

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM [NEC 690.56(C)(1)]

## Roof Access, Egress, and Ventilation

SolarAPP+ Fire Bulletin

### General

Access and minimum spacing shall be provided for access to specific areas of the roof, emergency egress from the roof and opportunities for smoke ventilation in accordance with the 2021 International Residential Code [IRC 324.6]

### References:

Ridge Setbacks - [IRC R324.6.2]

Sprinklered Occupancies - [IRC R324.6.2.1]

Pathways - [IRC 324.6.1]

Emergency escape and rescue openings - [IRC R324.6.3]

### Exceptions:

Detached, non-inhabitable structures [IRC R324.6 Ex. 1]

Low-slope roofs with pitch of less than or equal to 2:12; this exception may not be valid depending on the jurisdiction. [IRC R324.6 Ex. 3]

BIPV systems listed in accordance with Section 690.12(B)(2) of NFPA 70, where the removal or cutting away of portions of the BIPV system during fire-fighting operations has been determined to not expose a fire fighter to electrical shock hazards. [IRC R324.6 Ex. 4]

## Carbon Monoxide, Smoke & Heat Detectors

SolarAPP+ Fire Bulletin

### Guidance:

Carbon Monoxide and smoke detectors shall be provided in accordance with the code or an Affidavit has been provided by the customer. 2021 International Residential Code.[R314, R315]

## Fire Classification

SolarAPP+ Fire Bulletin

### PV System

Rooftop-mounted PV systems shall have the same fire classification as the roof assembly required in 2021 International Residential Code. [R902.4; R324.4.2]

Building-integrated photovoltaic products installed as the roof covering shall be tested, listed, and labeled for fire classification. [IRC R902.3, R324.5.2]

Building-integrated photovoltaic products installed as the roof covering shall comply with the minimum requirements for fire classification set by the jurisdiction. [IRC 902.1]

## Product Certifications

SolarAPP+ Fire Bulletin

### PV System

PV panels and modules shall be listed and labeled to UL 1703 and/or both UL 61730-1 and UL 61730-2 [NEC 690.4(B)][IRC R324.3.1]

Inverters shall be listed and labeled to UL 1741 [NEC 690.4(B)][IRC R324.3.1]

### Hazard Control System

Hazard control system shall be listed and labeled to UL 3741 [NEC 90.7; 110.3(C); 690.4(B); 690.12(B)(2)(1); 690.12(D)]

Service Disconnect

<b>SOLAR PV SYSTEM IS EQUIPPED WITH RAPID SHUTDOWN</b>	
TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN CONDUCTORS OUTSIDE THE ARRAY. CONDUCTORS IN ARRAY REMAIN ENERGIZED IN SUNLIGHT.	Simple Diagram Here

Location: No more than 1 m (3 ft) away from the service disconnecting means.

Code: [NEC 690.56(C)]

RSD Initiation Device

**RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM**

Location: Rapid shutdown initiation device.

Code: [NEC 690.56(C)(2)]

Point of Interconnection

**CAUTION: MULTIPLE SOURCES OF POWER**

(LAYOUT OR DESCRIPTION)

Location: Service location or approved readily accessible location

Code: [NEC 705.10]

**WARNING:**  
 DUAL POWER SOURCE  
 SECOND SOURCE IS PV SYSTEM

Location: Electrical Equipment containing overcurrent devices in circuits supplying power to a busbar or conductor supplied from multiple sources

Code: [NEC 705.12 (C)]

**WARNING:**  
 POWER SOURCE OUTPUT CONNECTION -  
 DO NOT RELOCATE THIS OVERCURRENT DEVICE

**WARNING:**  
 THIS EQUIPMENT FED BY MULTIPLE SOURCES. TOTAL RATING OF ALL OVERCURRENT DEVICES EXCLUDING MAIN SUPPLY OVERCURRENT DEVICE, SHALL NOT EXCEED AMPACITY OF BUSBAR

Location: At back-feed breaker if using 120% rule (if applicable)

Code: [NEC 705.12(B)(3)(2)]

Location: At distribution equipment adjacent to the back-fed breaker from the power source when using this "sum of breakers" code compliance rule.

Code: [NEC 705.12(B)(3)(3)]

PHOTOVOLTAIC POINT OF INTERCONNECTION

MAXIMUM AC OPERATING CURRENT:

MAXIMUM AC OPERATING VOLTAGE:

Location: All interactive system(s) points of interconnection.

Code: [NEC 690.54]

DC Circuit Raceways and Enclosures

PHOTOVOLTAIC POWER SOURCE

Location: Unless located and arranged so the purpose is evident, labels will be required for DC Circuit Raceways and Enclosures, conduit, and combiner/junction boxes.

Code: [NEC 690.31(D)(2)]

PV System Disconnect

**WARNING:**  
ELECTRIC SHOCK HAZARD TERMINALS ON LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION

Location: DC Disconnecting Means where terminals on both line and load side may remain energized. Example language or equivalent.

Code: [NEC 690.13(B)]

PV SYSTEM DISCONNECT

Location: Each PV System Disconnect (May be AC or DC)

Code: [NEC 690.13(B)]

DC String Inverters Equipment Disconnects

PHOTOVOLTAIC DC DISCONNECT

**WARNING:**  
ELECTRIC SHOCK HAZARD  
TERMINALS ON THE LINE AND LOAD  
SIDES MAY BE  
ENERGIZED IN THE OPEN POSITION

Location: Each PV system disconnecting means.

Code: [NEC 690.13(B)]

Location: Each PV system disconnecting means where line and load may be energized in the open position

Code: [NEC 690.13(B)]

PV SYSTEM MAXIMUM VOLTAGE:

Location: At each DC PV system disconnecting means.

Code: [NEC 690.53]

# FIRE SAFETY CODE REQUIREMENTS

Does the home have sprinkler systems?


Percentage of Roof Area covered with PV  
Total Array Area / Total Roof Area

## Roof Access and Ventilation Diagrams

Fire Safety

### Ridge Setbacks

PV Less Than 33% Roof Area (66% for homes with sprinkler systems)

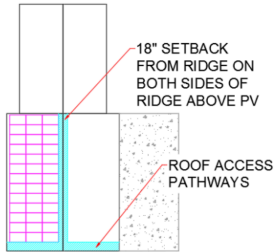


### Emergency Escape & Rescue Opening

Minimum 3' Emergency Escape Pathway




### Hips and Valley Setbacks

PV Less Than 33% Roof Area - Street Access (66% for homes with sprinkler systems)

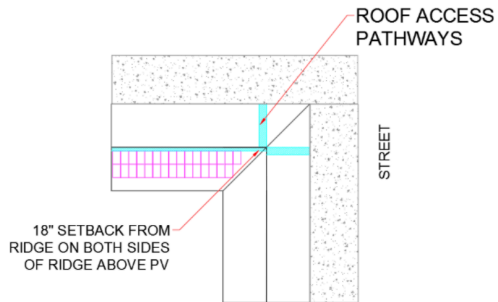

PV Less Than 33% Roof Area - Driveway Access (66% for homes with sprinkler systems)

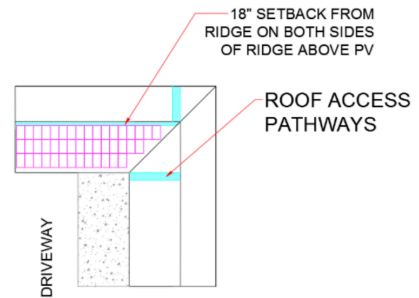

# FIRE SAFETY CODE REQUIREMENTS

Does the home have sprinkler systems?

Percentage of Roof Area covered with PV


Total Array Area / Total Roof Area

## Roof Access and Ventilation Diagrams

Fire Safety


### Ridge Setbacks

PV More Than 33% Roof Area (66% for homes with sprinkler systems)




### Emergency Escape & Rescue Opening

Minimum 3' Emergency Escape Pathway



### Hips and Valley Setbacks

PV More Than 33% Roof Area - Street Access (66% for homes with sprinkler systems)

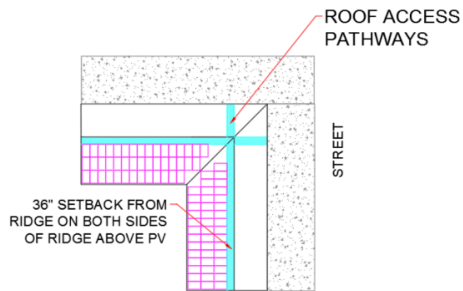

PV More Than 33% Roof Area - Driveway Access (66% for homes with sprinkler systems)

